


HOMEPOWER

Power you can count on.




Features & Benefits

- Compact All-In-One Battery Energy Storage System
- 6.1kWh expandable up to 24.4kWh
- AC Coupled for both new and retrofitted installations
- 3.6kW charge and discharge rate
- Built-in blackout protection (UPS)
- 24x7 connectivity via Cellular / Wifi / Ethernet
- Customisable EMS (Energy Management System) for different applications
- 24x7 monitoring through our web portal and user app (iOS & Android)
- Patented Magna-Flap conceals system controls and installer access panel
- Suitable for both indoor and outdoor installation (IP65 rating)
- DRED device support: DRM 0-8
- Virtual Power Plant ready

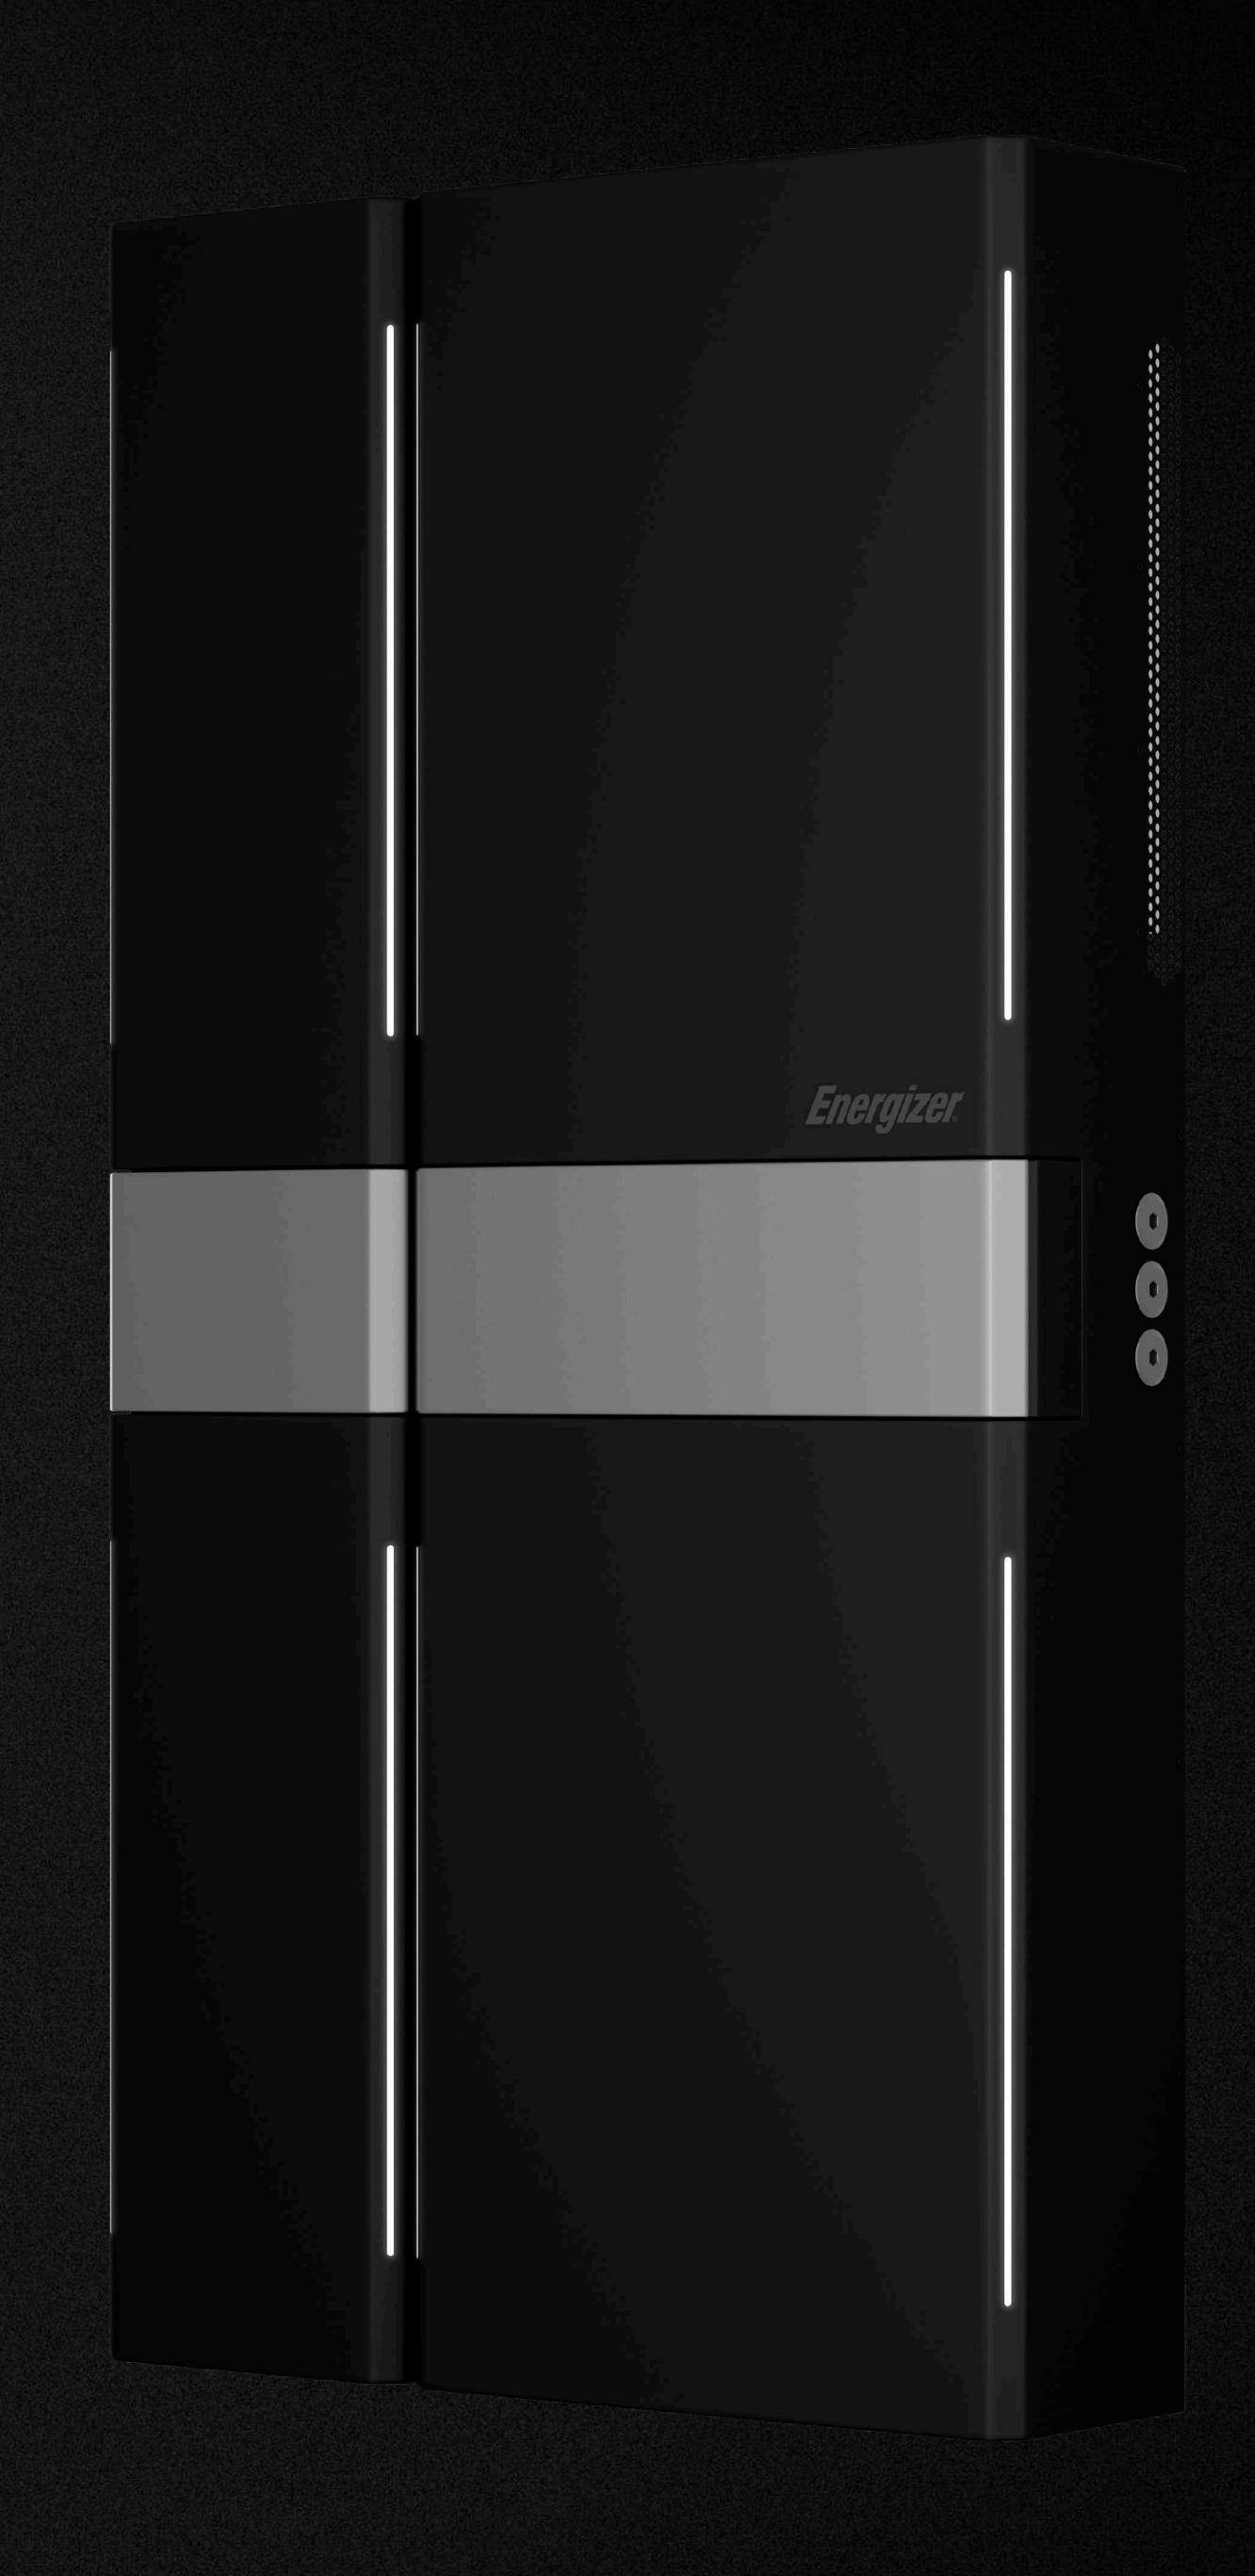

System Map

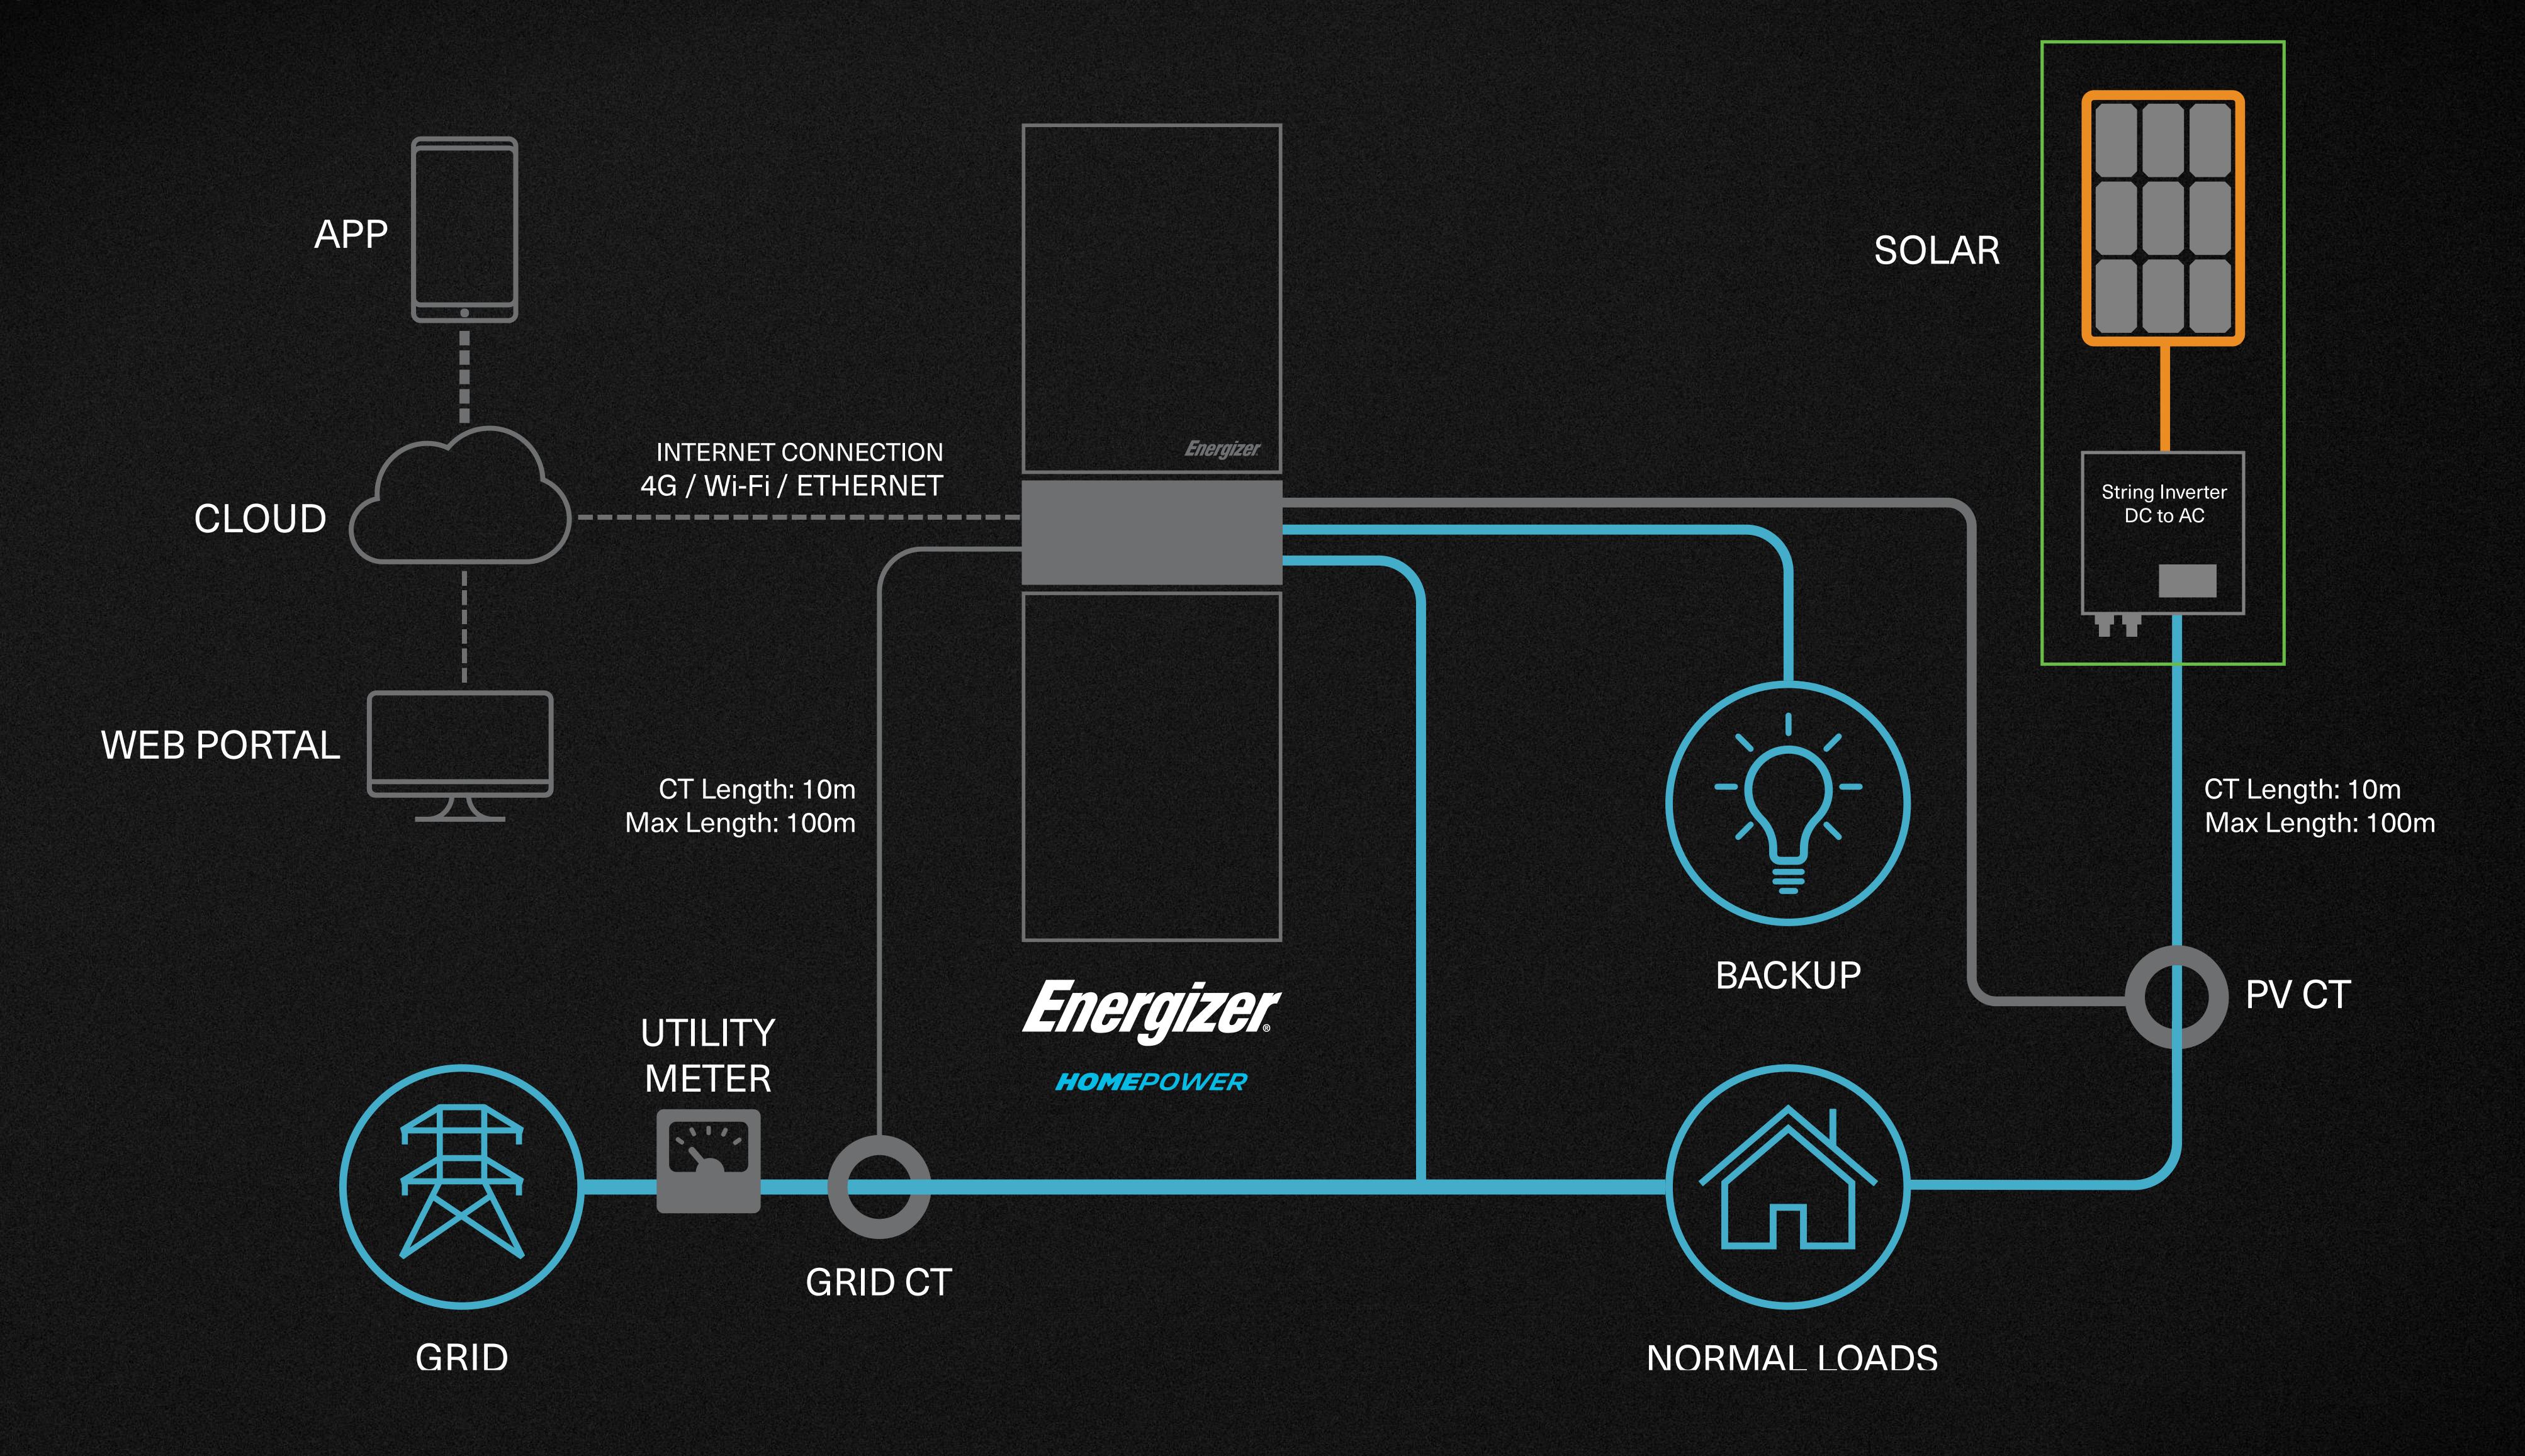

Technical Specifications: HP-6M



Inverter Specifications

Nominal AC Voltage 230V AC Input Voltage Range 180V - 265V Max AC Output Current 16A Rated AC Power (Grid) 3600W Rated AC Power (Backup) 3600W Max Charge / Discharge Power 3600W Output Frequency (AC) 50 / 60 Hz Power Factor Nominal Range 0.8 lead to 0.8 lag

AC Overvoltage Category Max Inverter Efficiency 94.00% DRED Device Support DRM 0-8

Cooling Method **Natural Convection**

Battery Specifications

Short Circuit Current

Nominal DC Voltage 51.2V Battery Energy 6.14kWh Max Continuous Battery Charge Current 71A DC Max Continuous Battery Discharge Current 71A DC LiFePO₄ **Battery Chemistry** Rated Capacity 120Ah Cell Type Prismatic Cycle Life 10,000 DOD (Depth of Discharge) 95% Protective Class DC Overvoltage Category Integrated 80A Magnetic / Thermal Trip Protection Circuit Protection Max DC Voltage 58.4V

8500A

Environmental Working Conditions

Ambient Temperature Charge: 0°C to 45°C / Discharge: -20°C to 50°C Relative Humidity 0 to 95% Ingress Protection IP65 Maximum Altitude 2,000m

Physical Specifications

Dimensions 1244mm H x 420mm W x 183mm D Case Material Steel (Powder coated) / Aluminium (Anodised) Mounting Method Wall Mounted Net Weight 98.5kg

Communication


Cellular / WiFi / Ethernet **Internet Connection** Web Portal / iOS App / Android App / LCD Panel Customer Access Installer App with direct connection via Bluetooth Installer Access Technician Access LCD Touchscreen Control Panel / Remote Access

Certification

Battery & BMS IEC 62619:2017 Transport UN 38.3 UPS AS 62040.1:2019 **Electromagnetic Compatibility** IEC 61000-2/-3 Grid Compliance AS/NZS 4777.2:2015

Warranty

Lifespan 10 Years Cycle Life 10,000

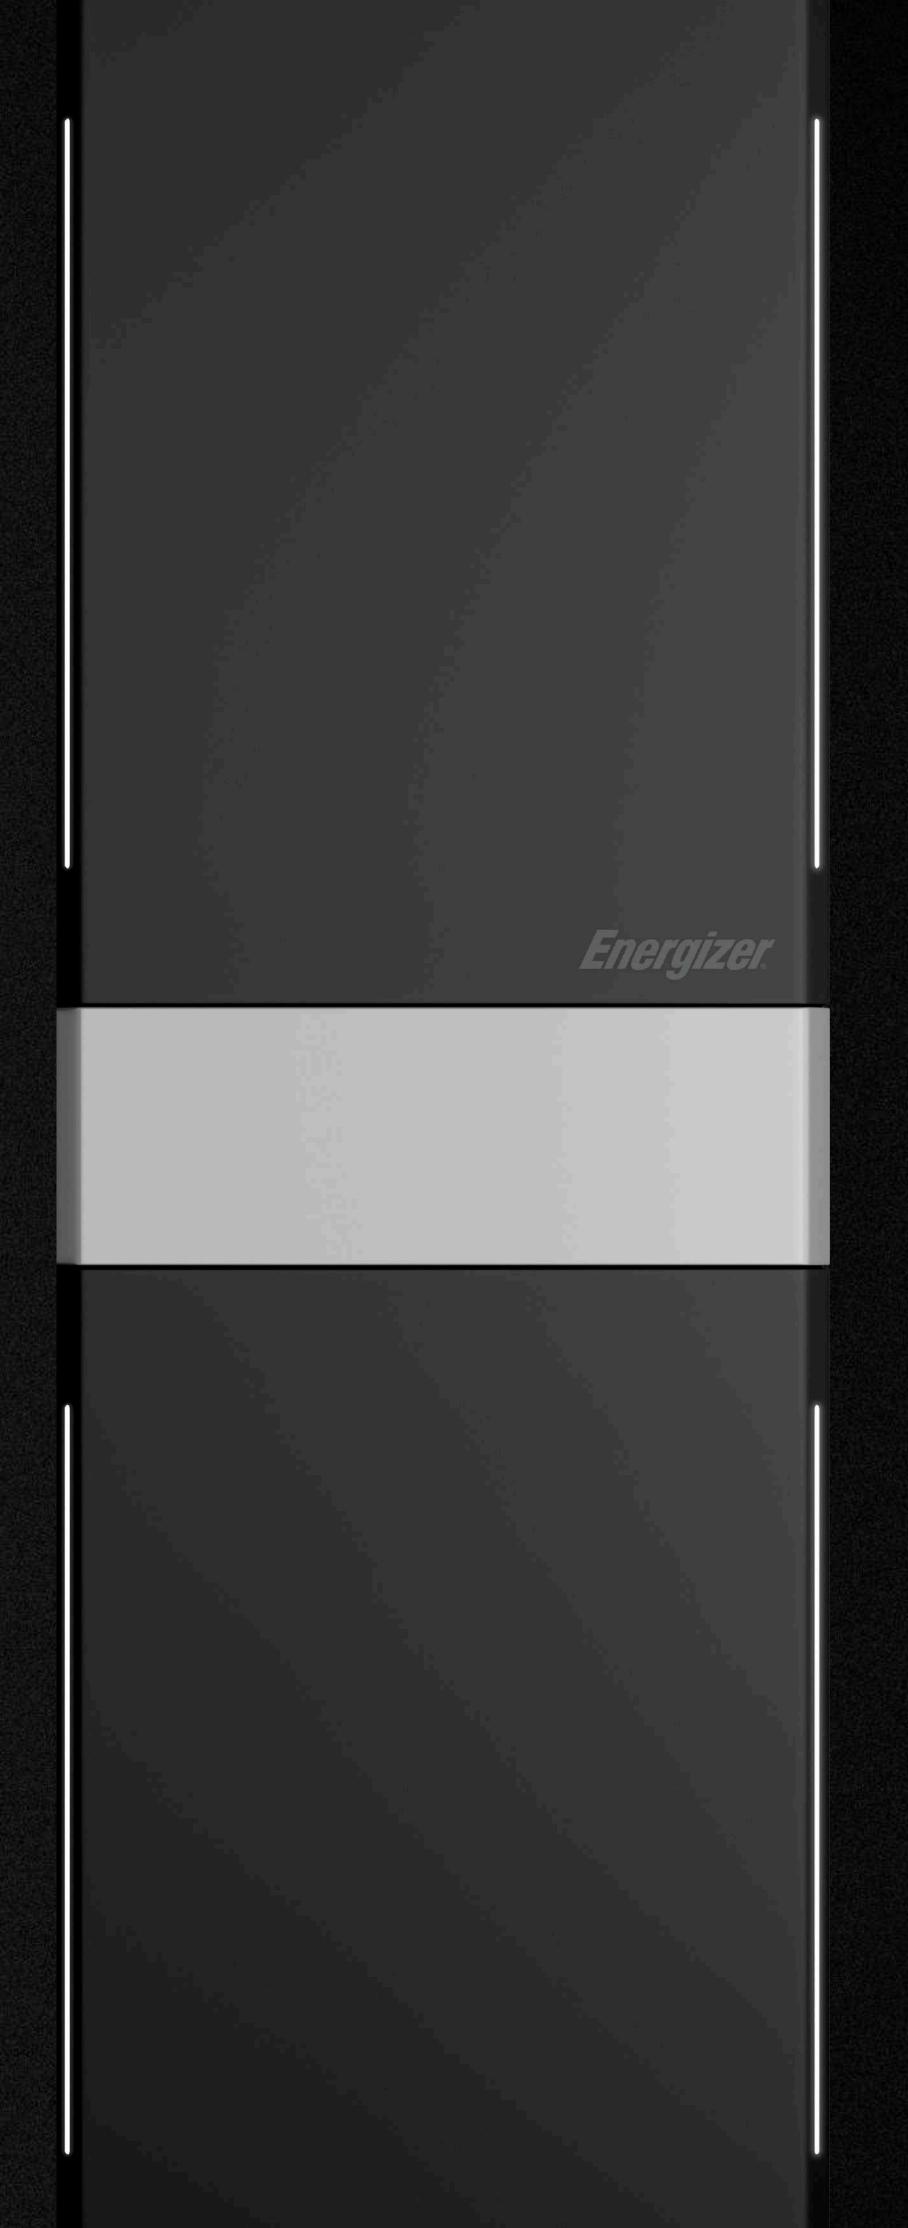

Technical Specifications: HP-655



Battery Specifications

Short Circuit Current

Nominal DC Voltage 51.2V Battery Energy 6.14kWh 71A DC Max Continuous Battery Charge Current 71A DC Max Continuous Battery Discharge Current LiFePO₄ **Battery Chemistry** Rated Capacity 120Ah Cell Type Prismatic Cycle Life 10,000 DOD (Depth of Discharge) 95% **Protective Class** DC Overvoltage Category Circuit Protection Integrated 80A Magnetic / Thermal Trip Protection Max DC Voltage 58.4V

Physical Specifications

1244mm H x 222mm W x 183mm D Dimensions Case Material Steel (Powder coated) / Aluminium (Anodised) **Mounting Method** Wall Mounted Net Weight 70kg

Certification

Battery & BMS IEC 62619:2017 Transport UN 38.3 Electromagnetic Compatibility IEC 61000-2/-3

Environmental Working Conditions

Ambient Temperature Charge: 0°C to 45°C / Discharge: -20°C to 50°C Relative Humidity 0 to 95% Ingress Protection IP65 Maximum Altitude 2,000m

8500A

Warranty

HP-6M / 1S

Lifespan 10 Years Cycle Life 10,000



HP-6 Series Energy Rating (kWh)

12.28 Usable Energy (kWh) 11.6 Capacity (Ah) 240 Dimensions (H/W/D; mm) 1244/646/183 Weight (kg) 168.5

HP-6M / 2S

18.42 17.4 360 1244/872/183 238.5

HP-6M / 3S

23.2 480 1244/1098/183

308.5

24.56

Contact Us:

energizerhomepower.com info@energizerhomepower.com